



# CSA Listed Explosion-proof Heaters

## Water Heaters

Enclosure-CSA Listed, NRTL/C,  
Explosion-proof Rated For Class I,  
Groups C, D, Division 1; Class II,  
Groups E, F, & G; Class III,  
NEMA 4 With Ground Screw

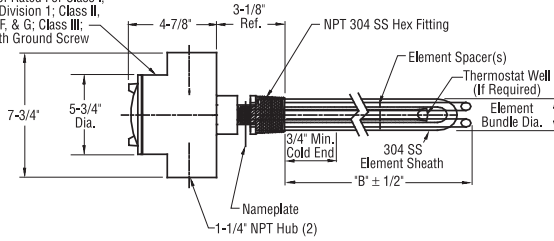

Enclosure-CSA Listed, NRTL/C,  
Explosion-proof Rated For Class I,  
Groups B, C, D, Division 1; Class II,  
Groups E, F, & G; Class III,  
NEMA 4 With Ground Screw

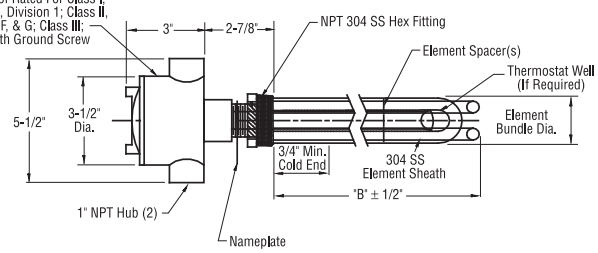

### 304 SS Sheath, 304 SS Fitting

### 50 W/Sq. In.

Number of Elements	KW	Without Thermostat										
		B Dimensions (Inches)	Catalog Number	Availability								
				1 Phase		3 Phase						
120V	208V	240V	480V	208V	240V	480V						
1	1	11-1/2	HX-713F2563	•	•	•						
	1.5	14-3/4	HX-713F2663	•	•	•	•					
	2	18-1/4	HX-713F2763	•	•	•	•					
	2.5	21-1/2	HX-713F2863	•	•	•	•					
	3	24-3/4	HX-713F2963	•	•	•	•					
	4	31-1/2	HX-713F3063	•	•	•	•					
	5	38-1/4	HX-713F3163	•	•	•	•					
	6	45	HX-713F3263	•	•	•	•					
2	2	11-1/2	HX-713F3363	•	•	•	•					
	2.5	13	HX-713F3463	•	•	•	•					
	3	14-3/4	HX-713F3563	•	•	•	•					
	3.5	16-1/2	HX-713F3663	•	•	•	•					
	4	18-1/4	HX-713F3763	•	•	•	•					
	5	21-1/2	HX-713F3863	•	•	•	•					
	6	24-3/4	HX-713F3963	•	•	•	•					
	8	31-1/2	HX-713F4063					•				
	10	38-1/4	HX-713F4163					•				
	12	45	HX-713F4263					•				
3	3	11-1/2	HX-713F4363	•	•	•	•	•	•	•	•	•
	3.75	13	HX-713F4463	•	•	•	•	•	•	•	•	•
	4.5	14-3/4	HX-713F4563	•	•	•	•	•	•	•	•	•
	5.25	16-1/2	HX-713F4663	•	•	•	•	•	•	•	•	•
	6	18-1/4	HX-713F4763	•	•	•	•	•	•	•	•	•
	7.5	21-1/2	HX-713F4863	•	•	•	•	•	•	•	•	•
	9	24-3/4	HX-713F4963			•	•	•	•	•	•	•
	12	31-1/2	HX-713F5063					•	•	•	•	•
	15	38-1/4	HX-713F5163						•	•	•	•
	18	45	HX-713F5263							•	•	•

With Built-in Thermostat									
B Dimensions (Inches)	Availability								
	1 Phase		3 Phase						
	120V	208V	240V	480V	208V	240V	480V		
11-1/2	•	•	•	•					
14-3/4	•	•	•	•					
18-1/4	•	•	•	•					
21-1/2	•	•	•	•					
24-3/4	•	•	•	•					
31-1/2	•	•	•	•					
38-1/4		•	•	•					
45		•	•	•					
11-1/2	•	•	•	•					
13	•	•	•	•					
14-3/4	•	•	•	•					
16-1/2	•	•	•	•					
18-1/4	•	•	•	•					
21-1/2	•	•	•	•					
24-3/4	•	•	•	•					
31-1/2	•	•	•	•					
38-1/4		•	•	•					
45		•	•	•					

Please specify volts, phase and thermostat range if needed. Use the table on page 33 to specify the Temperature Code Rating.