

934 SERIES

Wall Heater



The 934 Series wall heater is designed for recessed mounting into shallow 2-inch by 3-inch stud walls. It provides heat in a quiet, efficient manner. Single units can heat small areas and multiple heaters can be used in large or odd-shaped rooms.

- **Mounting Options:** Units can be surface (with optional box) or recessed mounted, vertically or horizontally, in one of four positions. A tapered recess box assures a tight fit when mounted into the wall.

Applications

- Breezeways
- Entryways
- Restrooms
- Small Offices
- Storage Rooms

Standard Construction Features

Heating Elements – Steel finned tubular elements.

Outlet Grille – The louvered front grille is made from 22-gauge steel with rounded corners. The grille is finished with a polyester powder paint in white or almond.

Built-in Controls – Automatic reset thermal cutout.

Fan Motor – Quiet, permanently lubricated axial fan operates at 38 dBA at 40 CFM for models up to

1,000 W and 41.3 dBA at 80 CFM for all models rated above 1,000 W.

Installation Requirements - The air outlet should be installed a minimum of ten inches above vinyl floors.

Rough In Dimensions – All heaters: 7-3/16" wide x 14-1/8" high x 3" deep.

Factory Built-in Options

Code	Description
D3	Disconnect Switch, 277V, Double-pole, 20 Amp
T1	Tamperproof Thermostat, Single-pole, 17 Amp
T2	Tamperproof Thermostat, Double-pole, 17 Amp
T5	Adjustable Thermostat, Single-pole, 17 Amp
T6	Adjustable Thermostat, Double-pole, 17 Amp

Double-pole thermostats include positive off feature.

Field-Installed Options

(shipped loose for field installation into heater)

Catalog Number	Description
934-124647	Surface Mounting Box
934-124648	Adjustable Thermostat Kit, Single-pole, 17 Amp
934-124649	Tamperproof Thermostat Kit, Single-pole, 17 Amp
934-124650	Adjustable Thermostat Kit, Double-pole, 17 Amp
934-124651	Tamperproof Thermostat Kit, Double-pole, 17 Amp

Standard colors - Add **W** for white finish or **A** for almond finish to the end of catalog number.


Special or custom colors - See inside back cover for color codes to be added to end of catalog number.

Remote Room Thermostat – See page 99



Phone: 314-333-5500
www.heatrex.com

934 SERIES Wall Heater

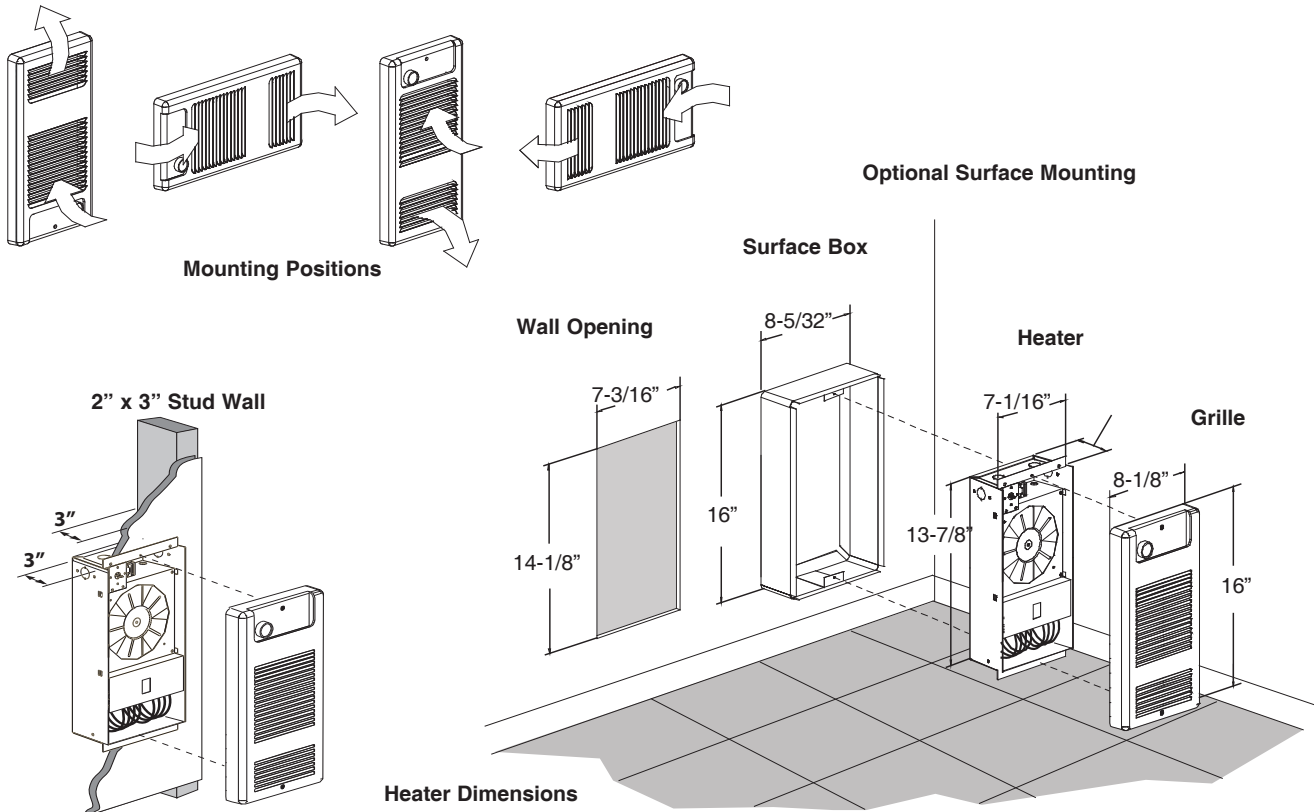

Heater Listing

Watts	Volts (1 Phase)	Total Amps (1)	CFM	Approximate Air Temperature Rise °F (°C)	Weight lb (kg)	Catalog Number
500	120	4.6	40	40 (22)	9 (4)	HX-934U00500B
500/375	240/208	2.3/2.0	40	40/30 (22/17)	9 (4)	HX-934U00500V
750	120	6.7	40	60 (33)	9 (4)	HX-934U00750B
750/563	240/208	3.3/2.9	40	60/45 (33/25)	9 (4)	HX-934U00750V
1000	120	8.7	40	80 (44)	9 (4)	HX-934U01000B
1000/750	240/208	4.5/3.8	40	80/60 (44/33)	9 (4)	HX-934U01000V
1250	120	10.8	80	50 (28)	9 (4)	HX-934U01250B
1250/938	240/208	5.4/4.7	80	50/37 (28/21)	9 (4)	HX-934U01250V
1500	120	12.9	80	60 (33)	9 (4)	HX-934U01500B
1500/1125	240/208	6.5/5.6	80	60/45 (33/25)	9 (4)	HX-934U01500V
2000/1500	240/208	8.5/7.4	80	80/60 (44/33)	9 (4)	HX-934U02000V
2000	208	9.8	80	80 (44)	9 (4)	HX-934U02000C

(1) Total Amps = Heating element amps and motor amps.

Standard colors - Add W for white finish or A for almond finish to the end of catalog number.

Special or custom colors - See inside back cover for color codes to be added to end of catalog number.



Phone: 314-333-5500
www.heatrex.com